



D 3499.

U. 26-12-29

DESIGN <i>13</i>	DRAWN BY	<b>DART AEROSPACE USA, INC.</b> PORT HADLOCK, WA	
CHECKED	APPROVED	DRAWING NO. <b>D3499</b>	REV. B SHEET 2 OF 4
DATE <b>06.07.07</b>		TITLE <b>CABLE GUARD</b>	SCALE 1:8

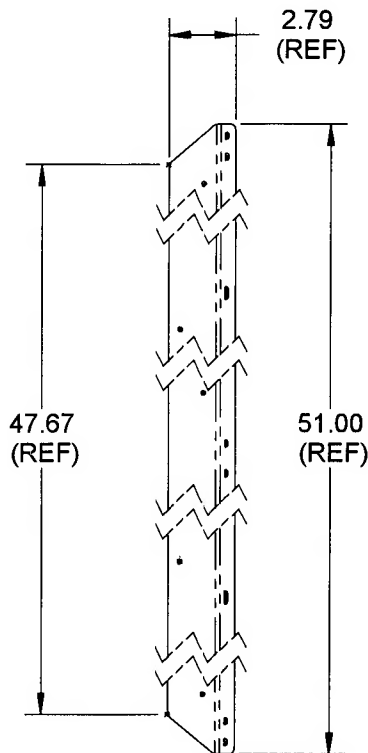


REFERENCE ONLY

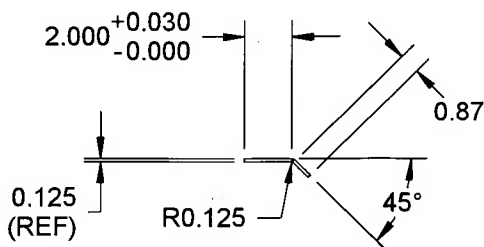

**D3499-2 MOUNTING PLATE**

**NOTES:**

- 1) MATERIAL: 6061-T6 ALUMINUM SHEET (0.125 THICK)  
PER AMS-QQ-A-250/11 OR AMS 4025 OR AMS 4027  
(REF. DART SPEC. M6061T6S.125)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005. 4.1  
POWDER COAT WHITE (REF. 4.3.5.2) PER DART QSI 005 4.3
- 3) TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) ALL DIMENSIONS ARE IN INCHES
- 5) BREAK ALL SHARP EDGES 0.005 TO 0.010

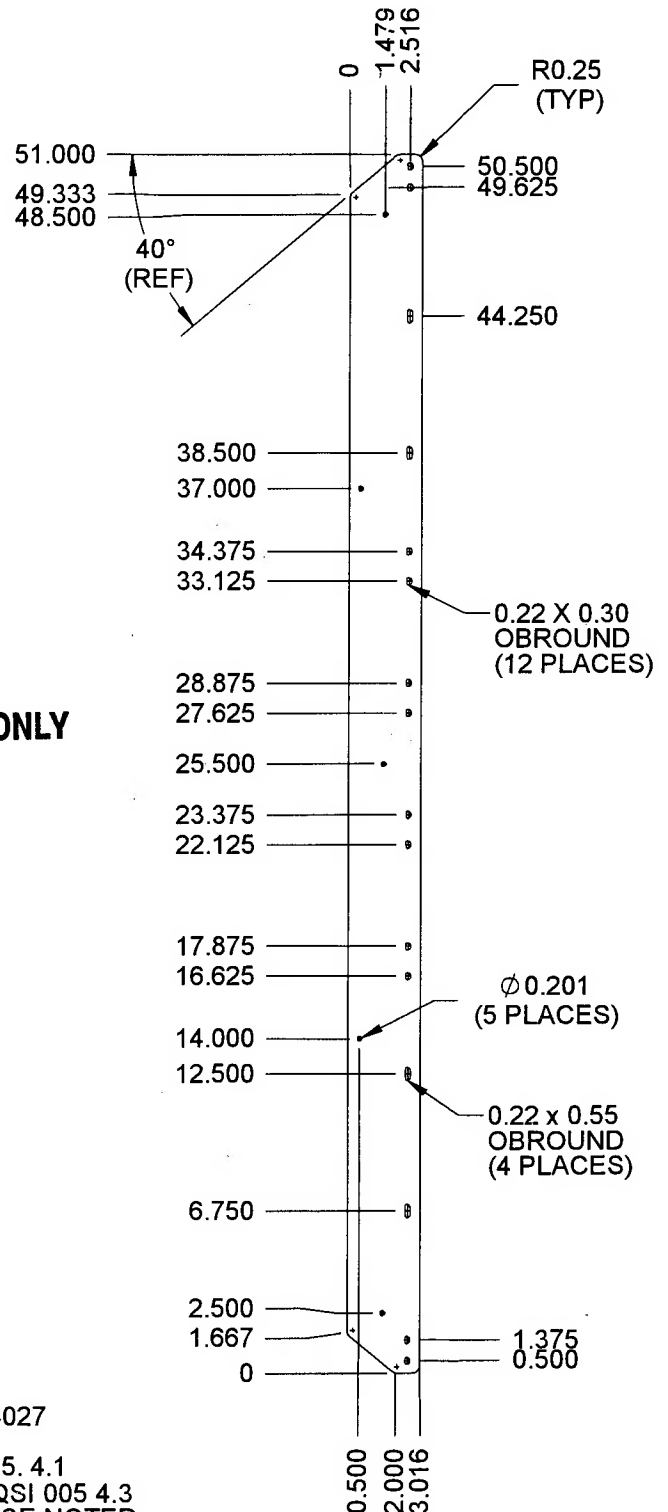

**D3499-2F MOUNTING  
PLATE FLAT PATTERN**

COPYRIGHT © 2006 BY DART AEROSPACE USA, LTD.




THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.

DART AEROSPACE LTD		Work Order:	45A
Description: Cable Guide Cover		Part Number:	D3499
Inspection Dwg: D3499, Rev: B		Page 1 of 1	

### FIRST ARTICLE INSPECTION CHECKLIST

☒ First Article ☒ Prototype

Drawing Dimension	Tolerance	Actual Dimension	Accept	Reject	Method of Inspection	Comments
1.500	±.010	1.500	/			
1.375	±.010	1.375	/			
6.750	±.010	6.750	/			
12.5	±.010	12.500	/			
16.625	±.010	16.625	/			
17.875	±.010	17.875	/			
22.125	±.010	22.125	/			
23.375	±.010	23.375	/			
27.625	±.010	27.625	/			
28.875	±.010	28.875	/			
33.125	±.010	33.125	/			
34.375	±.010	34.375	/			
38.500	±.010	38.500	/			
44.250	±.010	44.25	/			
49.625	±.010	49.625	/			
50.500	±.010	50.500	/			
22 x 30	±.030	210 x .30	/			
22 x .55	±.030	210 x .55	/			

Measured by: 	Audited by: 	Prototype Approval: 
Date: 06/07/10	Date: 06/07/10	Date: 10/27/06

Rev	Date	Change	Revised by	Approved
A		New Issue	KJ/JLM	